
单页： 240*140mm,折后:80*140mm， 正反印刷

# Flame speaker

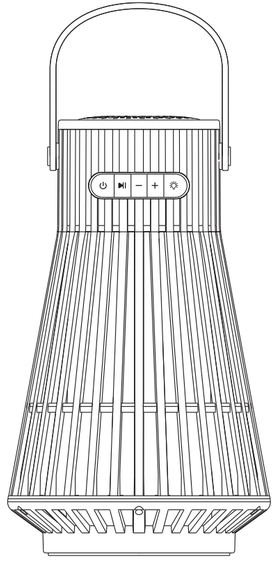

Please read carefully before use


## Product information

- Button control, easy to use
- Flame lamp
- Night light
- When using both two wireless speakers,the left and right channels be separated to be on the box.Stereo output crdates perfect sound. (Notice:When using a single wireless speaker,the left and right channels will be combined to output.)
- Wireless speaker function
- White LED light flashes,shows wireless speaker is ON.White LED light lights in long time,shows wireless speaker connected success fully.
- When charging,it shows the red light.The red light goes off,shows the lamp full charged.
- IP65 dustproof and waterproof

## Technical Parameters

| | | | |
|---|---|---|---|
| Wireless version | V5.0 | Distortion Rate | ≤10% |
| Output Power | 5W | SNR | >80dB |
| Transmission Distance | ≥10m | Horn Parameters | Φ52mm 4Ω 8W |
| Frequency Response | 50Hz-20kHz | Power Supply | 5V 1A |
| The Charging Interface | Type-C | Product Size | 113x113x188mm |
| Built-in Lithium Battery | 3.7V/3600mAh | | |

## Flame Lamp mode



Flame lamp and speaker are independently designed and controlled. Short press the light key " " for the first time, and the flame light will turn on. Short press the light key " " for the second time to turn on the night light, and long press the light key " " to adjust the brightness or darkness of the night light. Short press the light key " " for the third time, the night light goes out, and the cycle repeats in sequence.

### Wireless speaker mode

**Single speaker use**

- Long press ⏻ button to turn on speaker and with a beep.The blue indicator light flashes slowly,search wireless name "AJ100" on the phone. After the connection is successful, the indicator light will be always on and accompanied with a beep.
- Short press — button to switch to the previous song, long press to lower the volume.
- Long press + button to switch to next song, long press to increase the volume. When the volume reaches the maximum, there will be a beep.
- Long press ⏯ button to cancel pairing with mobile phone.
- Short press ⏯ button to pause or resume playing.

**Double speakers use**

Two speakers pairing

- Long press ⏻ button at same time to turn on the two speakers, short press or double press the ⏻ button of any speaker to enter the pairing. After the pairing is successful, the indicator light will be on and there will be a beep.
- If one speaker is successfully connected and to connect another one to form left and right channels, just turn on the left speaker power, and then short press or double press the ⏻ button of the connected speaker. After the pairing is successful, there will be a beep.( Be sure to short or double press the speakers that have been paired successfully, otherwise the pairing cannot be successfully combined).


## Double Speaker Use

- When the matching of the case is successful, the connection method of the mobile phone is the same as that of the single speaker. Only one search name will be displayed on the phone. After the connection is successful, the sound will come out from both speakers at the same time.
- If only want to use single speaker, directly turn off the power of the other or long press the ⏯ button to cancel the combination.

## Charging instructions

**Power input**

- Plug the USB into the USB port on the side of the speaker for charging, the red light will be on when charging, and it will go out when.




**Attention**

- Please charge in 0℃-40℃ environment
- Not recommended to use while charging
- Please unplug the charging cable in time after fully charged
- Do not charge the speaker in a humid environment

# Warranty Card

## Applicable for

- Since buying date,the user enjoys one year free repair services under normal use.After one year,will be charged according to each component part cost.
- In case change component part,will be charged according to our company's component part cost list.
- The following situations without free repair services in warranty period
  1)Damage caused by natural earthquake,rat disaster,and unnormal use.
  2)Damage caused in transportation,fall,and unproper storage.
  3)Consumable component,such as spare parts,batteries,light bulbs,etc.
  4)Warranty information records is not complete,no purchase date, no buying shop seal,etc.
  5)Featured using environment,such as humidity,sulfur area, high salty and on board,etc,easy corrosion area.
  6)Using not according to the instructions.
  7)Special offer.
- When return to factory for repair,the user should make sure the product packed properly to avoid any damage during transportation.
- Factory not responsible for the damages caused by the users themselves unproper disassemble.

Important

Thank you for purchasing our products.

To guarantee your rights,please fill in this form properly,Thank you

| | |
|---|---|
| Name | |
| Address | |
| Telephone | |
| Invoice number | |
| Purchase date | |
| Item number | |
| Dealers | Note:this field requires the dealer's seal! |

Warning:please keep this warranty paper for repair presentation.

## Attention

- In order to use the speaker correctly, ensure the good performance of the speaker, please read carefully and observe below:
- Please do not impact the mainframe seriously
- Please do not contact benzene, diluent and other chemicals
- Please do not close to the magnetic and electric field
- Please avoid directly lighting and heating appliances
- Please do not repair, disassemble, transform by users themselves